

1/8

100

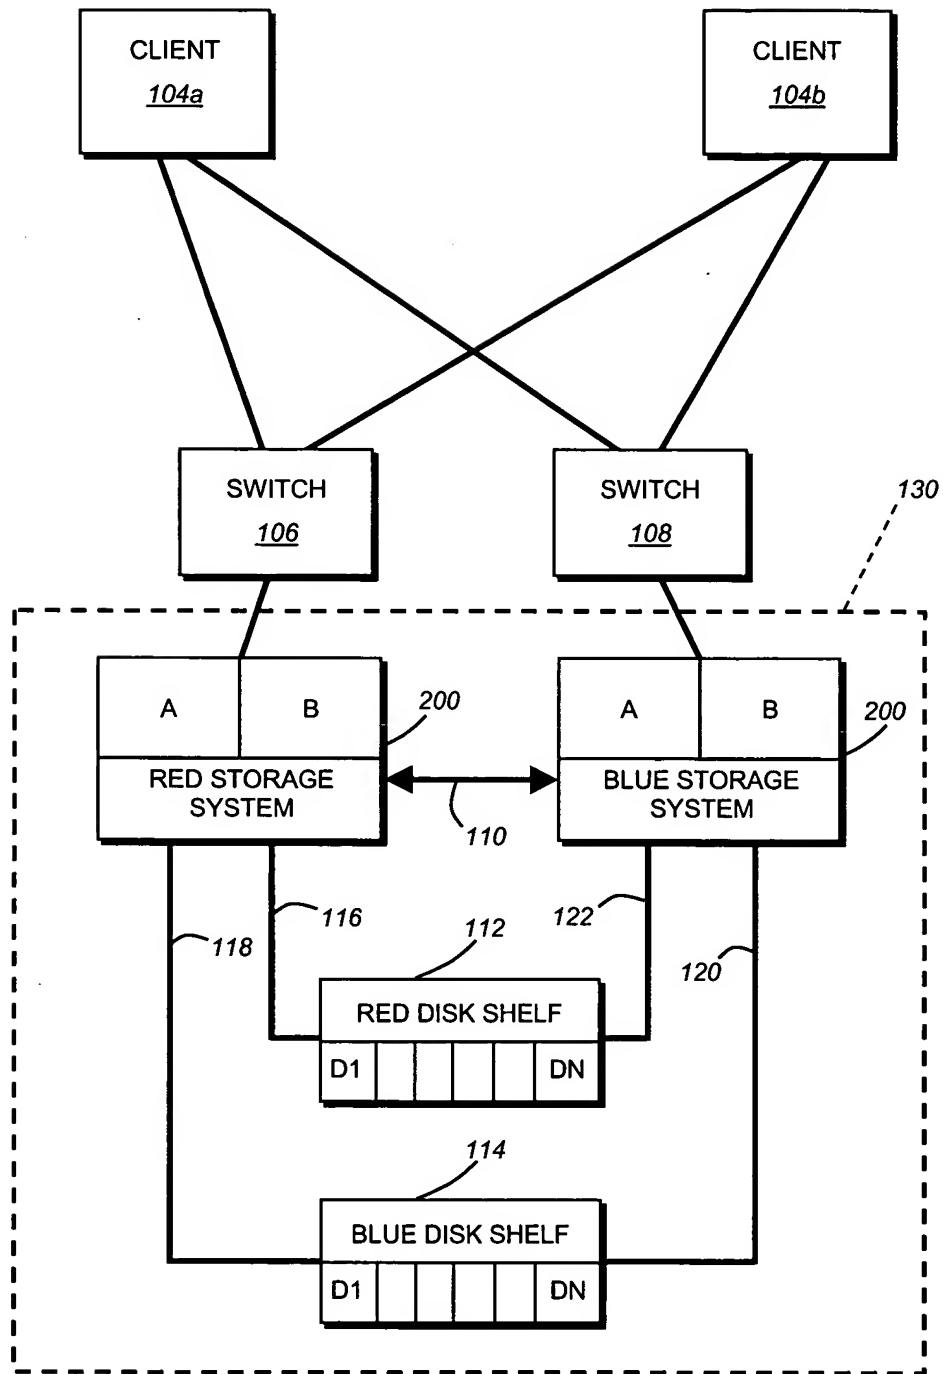


FIG. 1

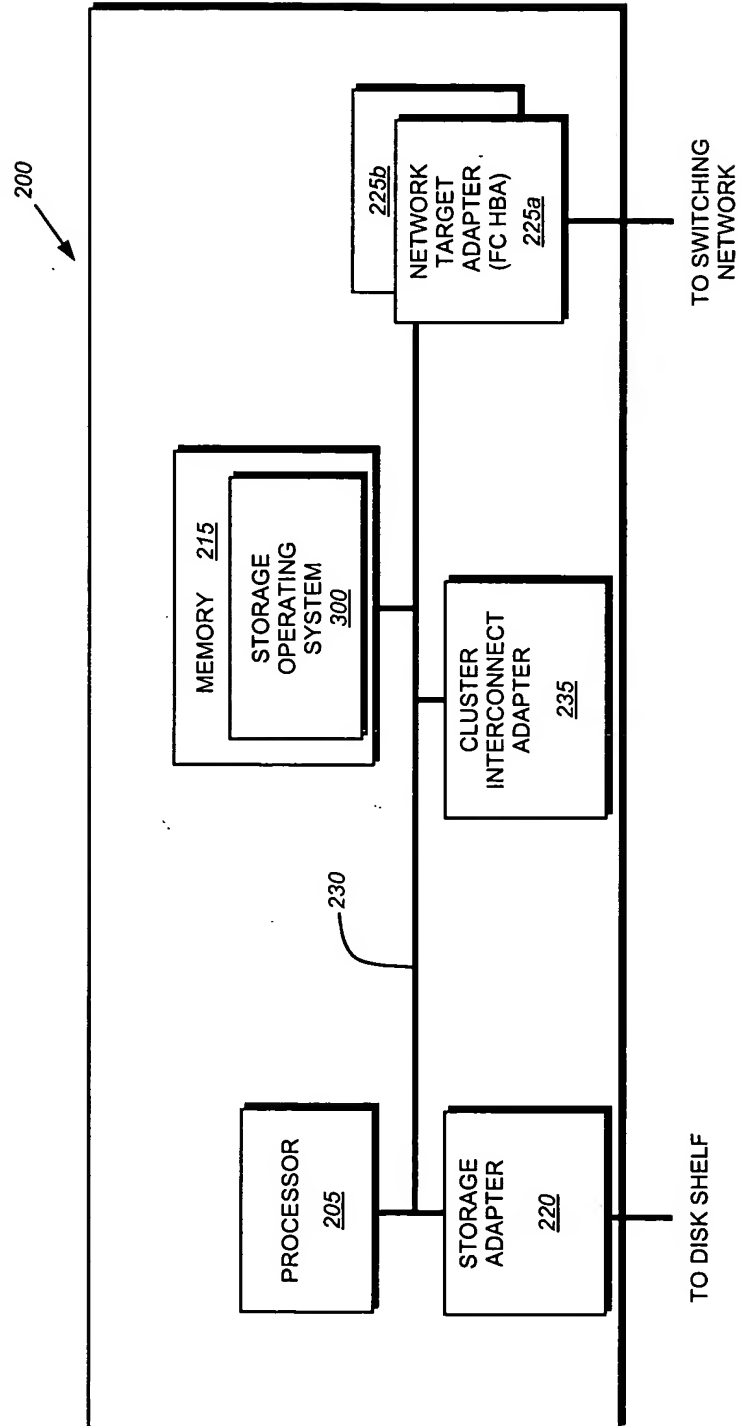


FIG. 2

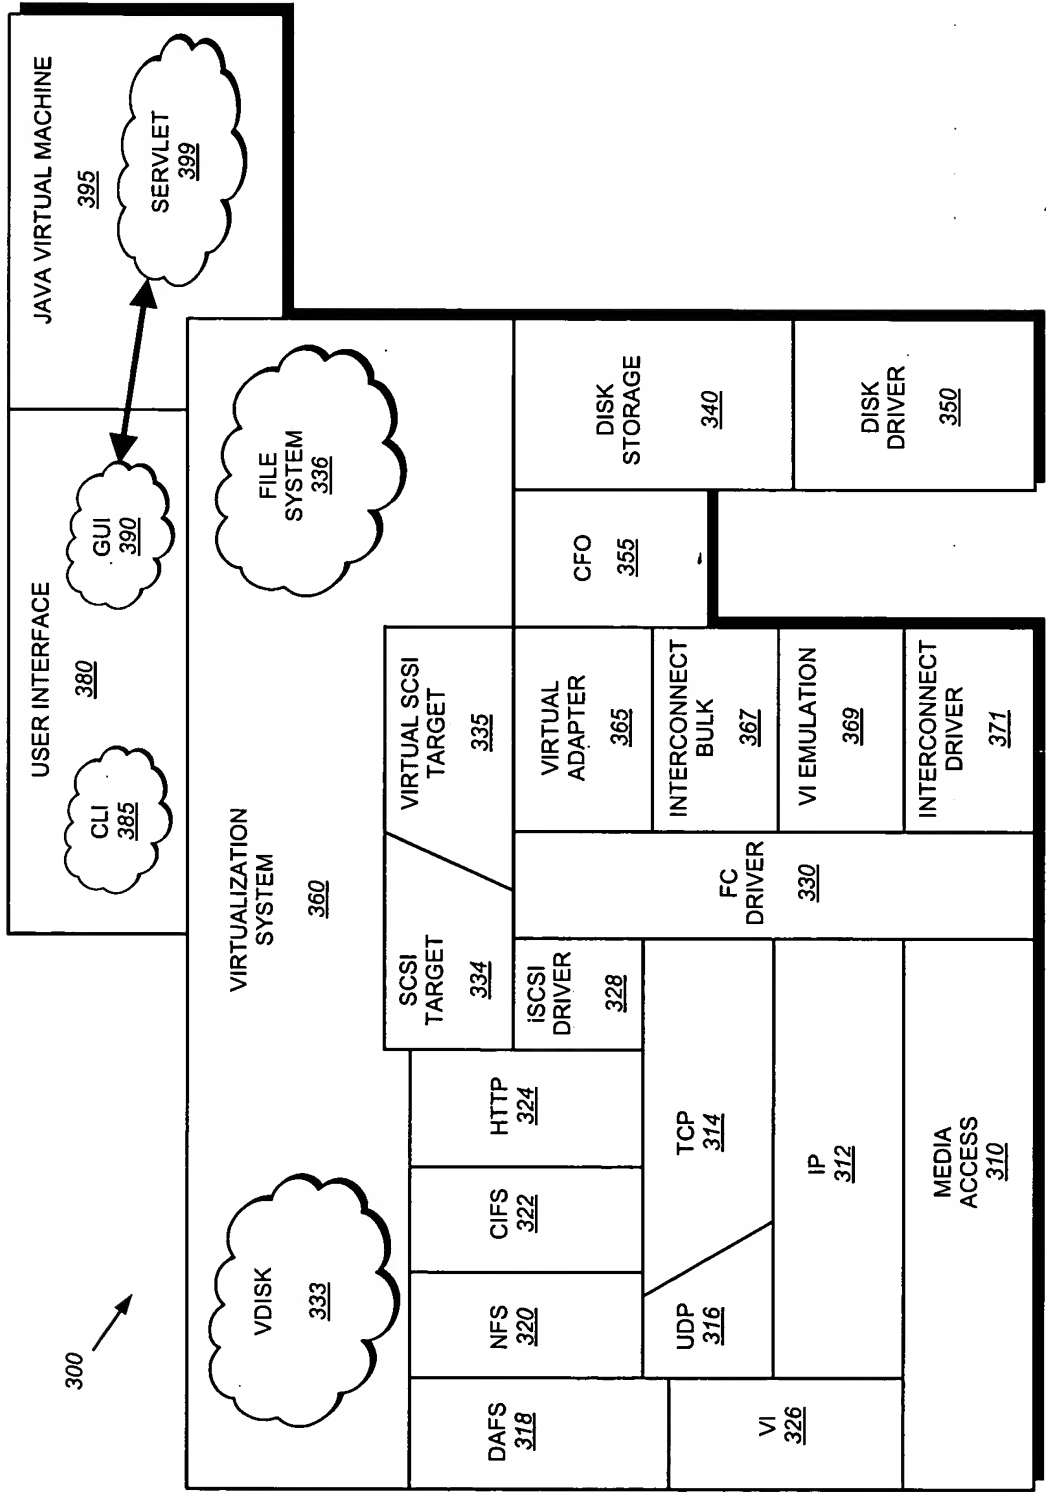


FIG. 3

4/8

ADAPTER MODE	<u>405</u>
NUMBER OF VIRTUAL PORTS	<u>410</u>
VIRTUAL PORT DATABASE []	<u>500</u>
LOOP TO VP INDEX []	<u>415</u>
⋮	<u>420</u>

400
↙

FIG. 4

STATE	<u>505</u>
MODE	<u>510</u>
HOST	<u>515</u>
NODE NAME	<u>520</u>
PORT NAME	<u>525</u>
LOOP ID	<u>530</u>
DEVICE ID	<u>535</u>
⋮	<u>540</u>

500
↙

FIG. 5


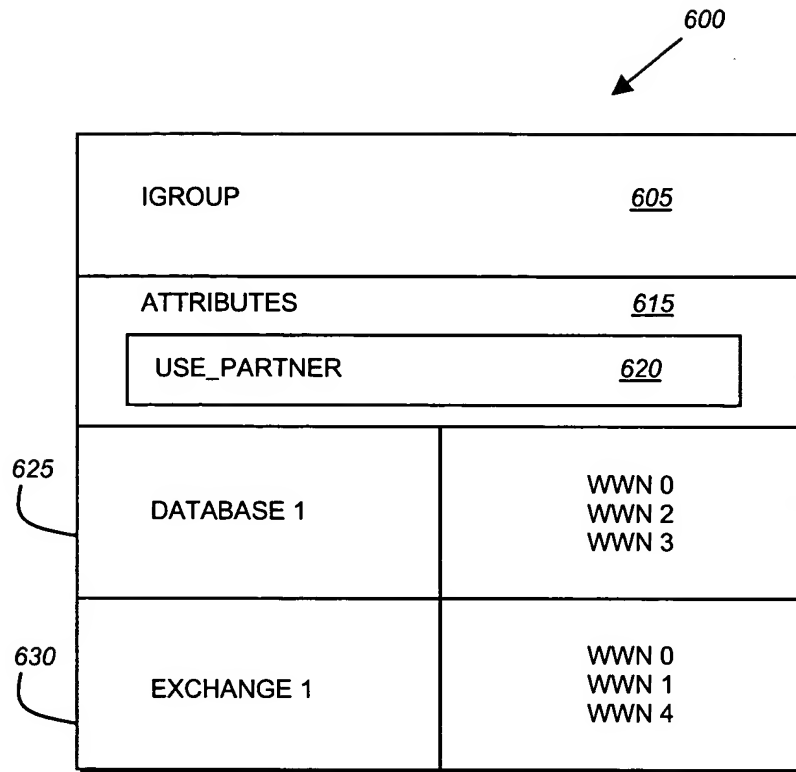


FIG. 6

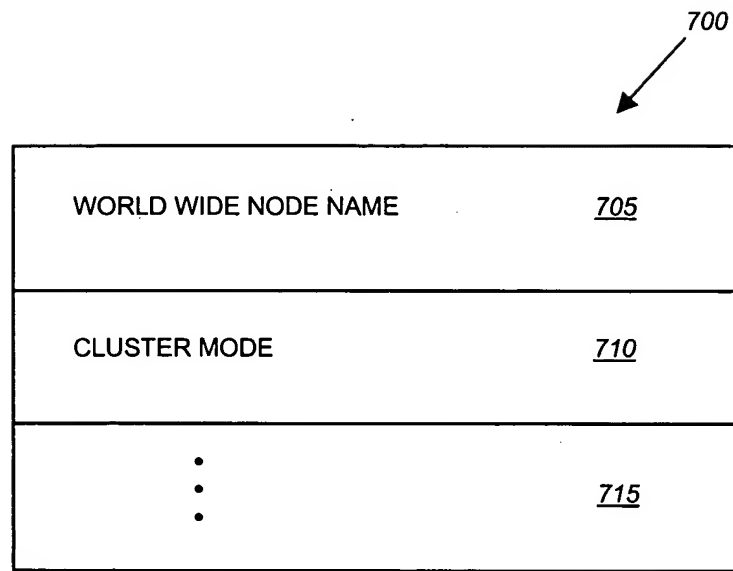

700

WORLD WIDE NODE NAME	<u>705</u>
CLUSTER MODE	<u>710</u>
⋮	<u>715</u>

FIG. 7

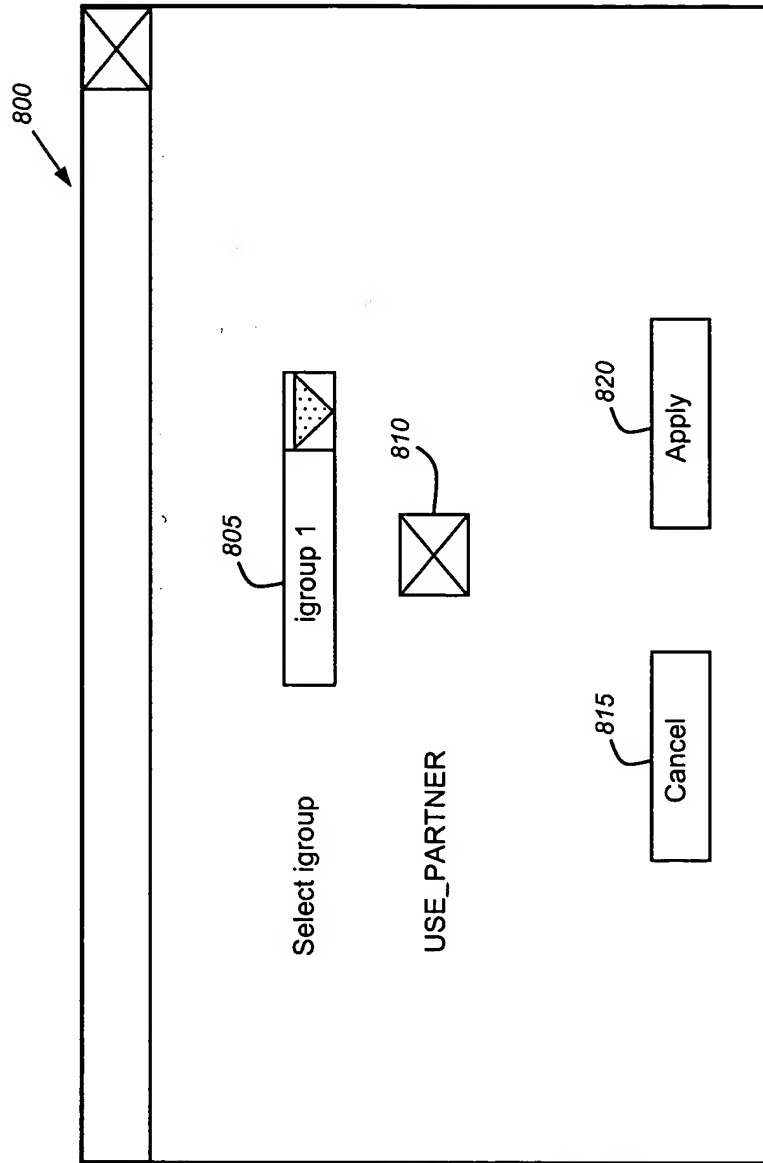


FIG. 8

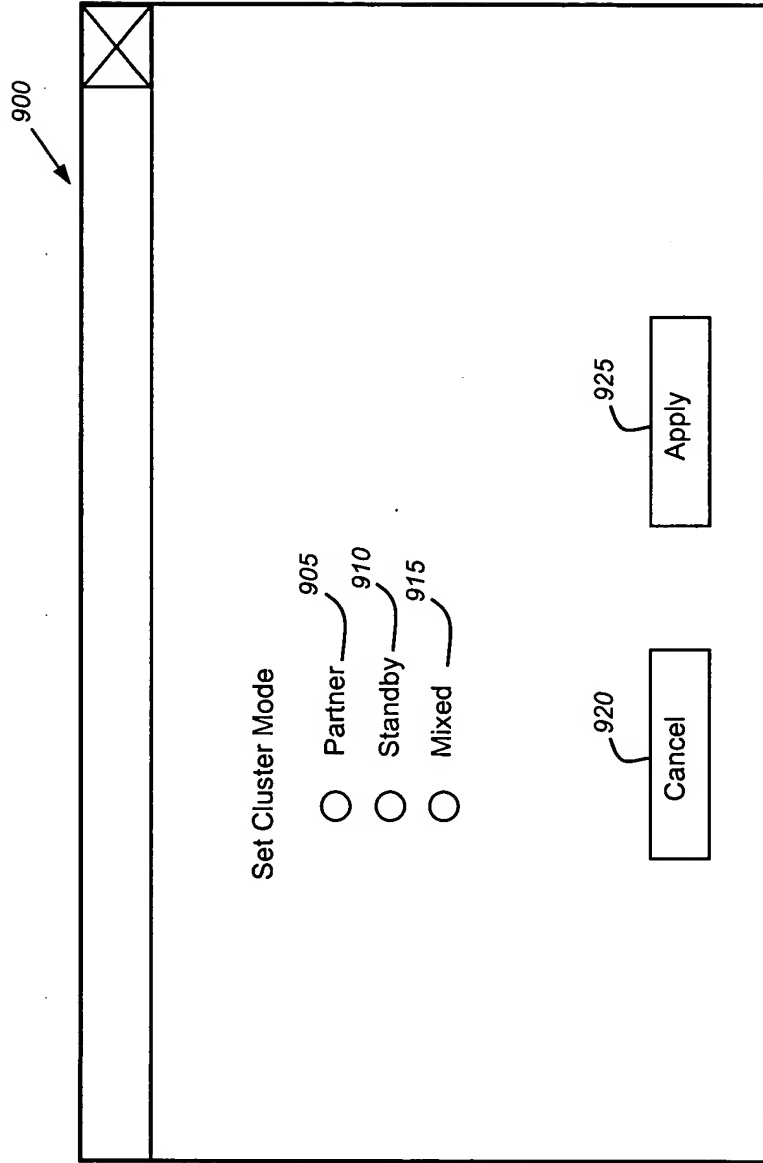


FIG. 9